


Metallics

An **AMERICAN** Source For Premier
and Innovative Fasteners and Anchors

SPLIT LOCK WASHERS – DOMESTIC STEEL ZINC AND STEEL ZINC

The following Specification Sheet applies to all **Split Lock Washers – Domestic Steel-Zinc and Steel Zinc** in our **JLW series**.

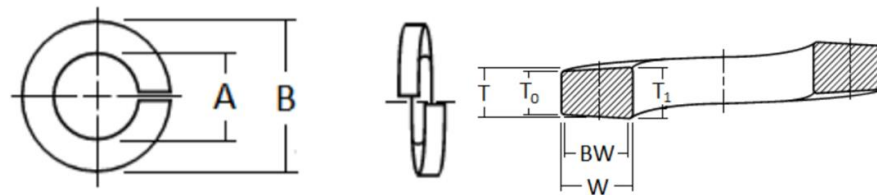

Nominal Washer Size	A		B	T	W	BW
	Inside Diameter		Outside Diameter	Mean Section Thickness ($t_1 + T_0$)/2	Section Width	Bearing Width
	Max.	Min.	Max.	Min.	Min.	Min.
4	.120	.114	.209	.025	.040	.028
6	.148	.141	.250	.031	.047	.033
8	.174	.167	.293	.040	.055	.038
10	.200	.193	.334	.047	.062	.043
12	.227	.220	.377	.056	.070	.049
1/4	.260	.252	.487	.062	.109	.076
5/16	.322	.314	.583	.078	.125	.087
3/8	.385	.377	.680	.094	.141	.099
7/16	.450	.440	.776	.109	.156	.109
1/2	.512	.502	.869	.125	.171	.120
9/16	.574	.564	.965	.141	.188	.132
5/8	.641	.628	1.073	.156	.203	.142
3/4	.766	.753	1.265	.188	.234	.164


Metallics

229 Cross Street
Bristol, CT 06010

www.metallics.us

Phone: 860 589-4186 Toll Free: 800 243-8272

Fax: 860 584-1008 Toll Free Fax: 800 831-9358



Metallics

An **AMERICAN** Source For Premier
and Innovative Fasteners and Anchors

Specification Requirements:

- Dimensions: ASME B18.21.1
- Material: Carbon Steel per SAE J403 1055-1065 or
Grade 55-65 per GB/T 699
- Hardness: HRC 38 to 46
- Finish: Mechanical Zinc per ASTM B695, Class 5, Type 1
Finish shall be in compliance with current RoHS European
Union Directive

Metallics

229 Cross Street
Bristol, CT 06010

www.metallics.us

Phone: 860 589-4186 Toll Free: 800 243-8272

Fax: 860 584-1008 Toll Free Fax: 800 831-9358